


Turmdrehkran 120 K.1

Tower Crane / Grue à tour / Gru a torre / Grúa torre
Guindaste de torre / Башенный поворотный кран

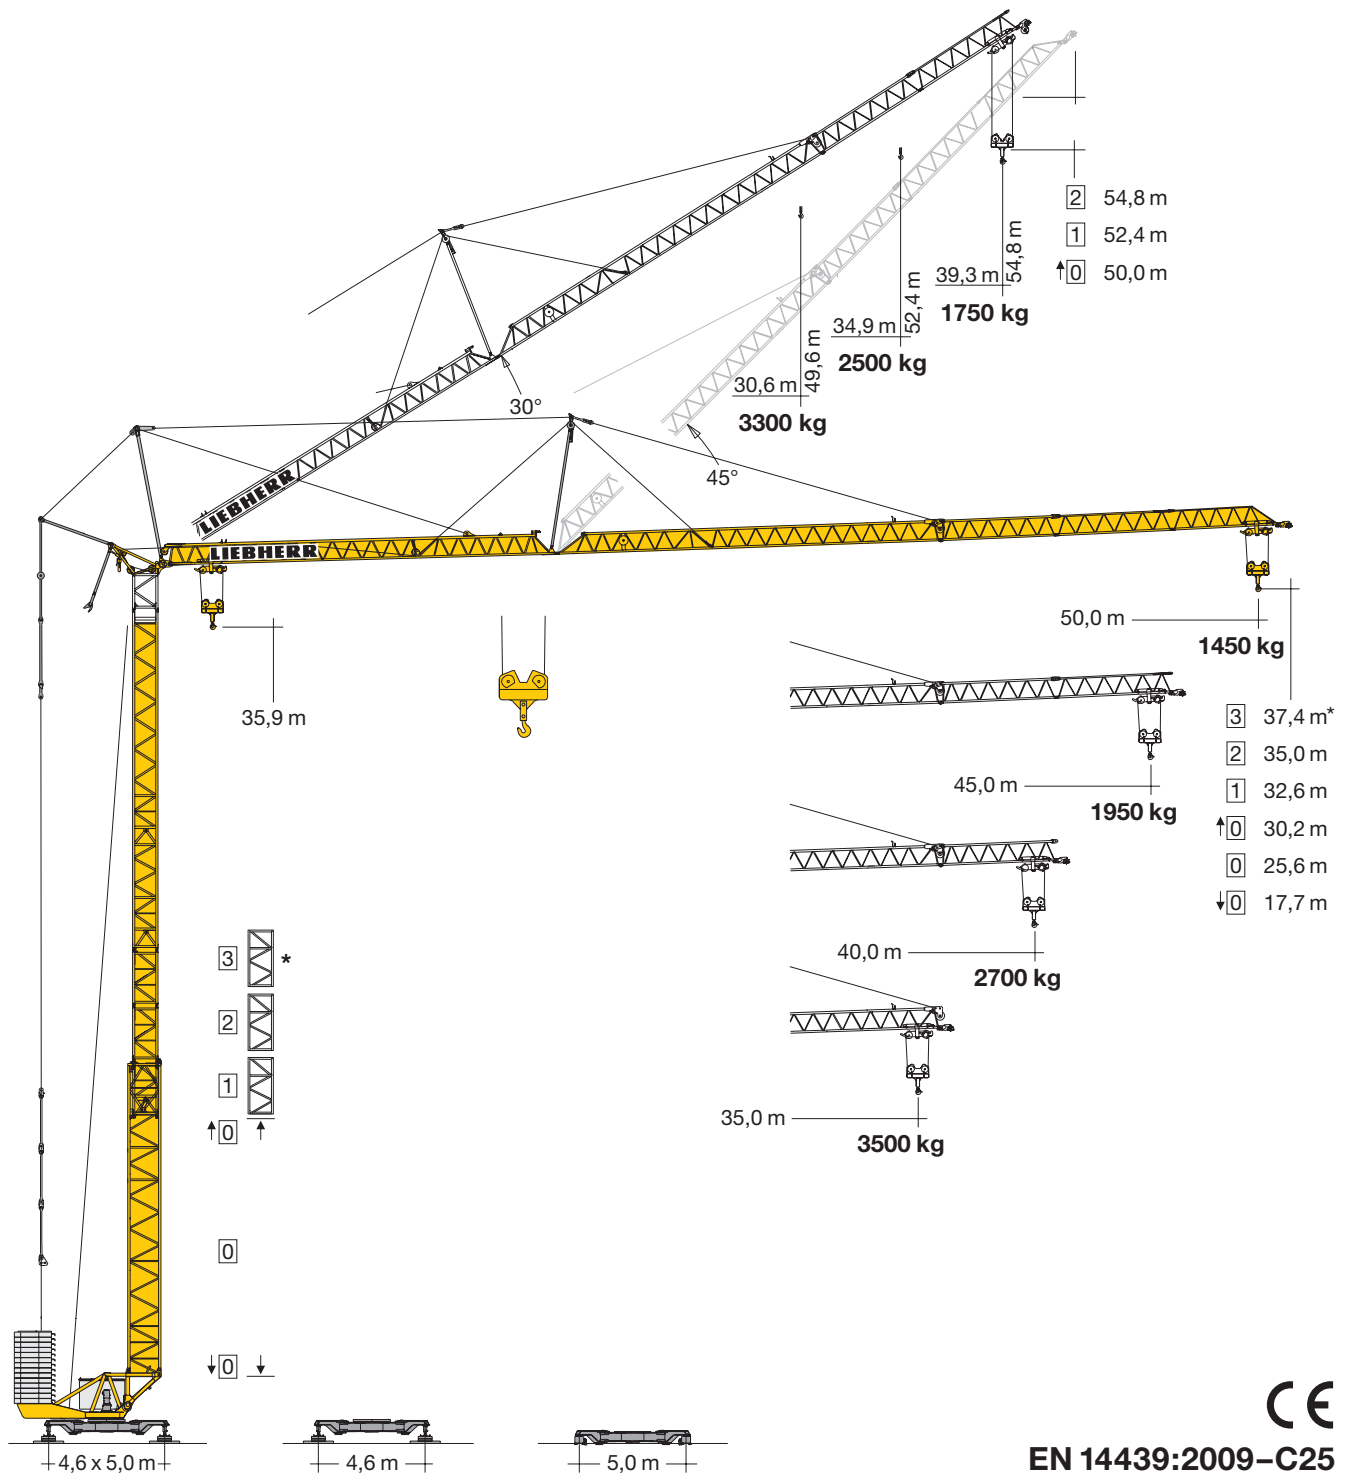


CE

EN 14439:2009-C25

LIEBHERR

Courtesy of Crane.Market

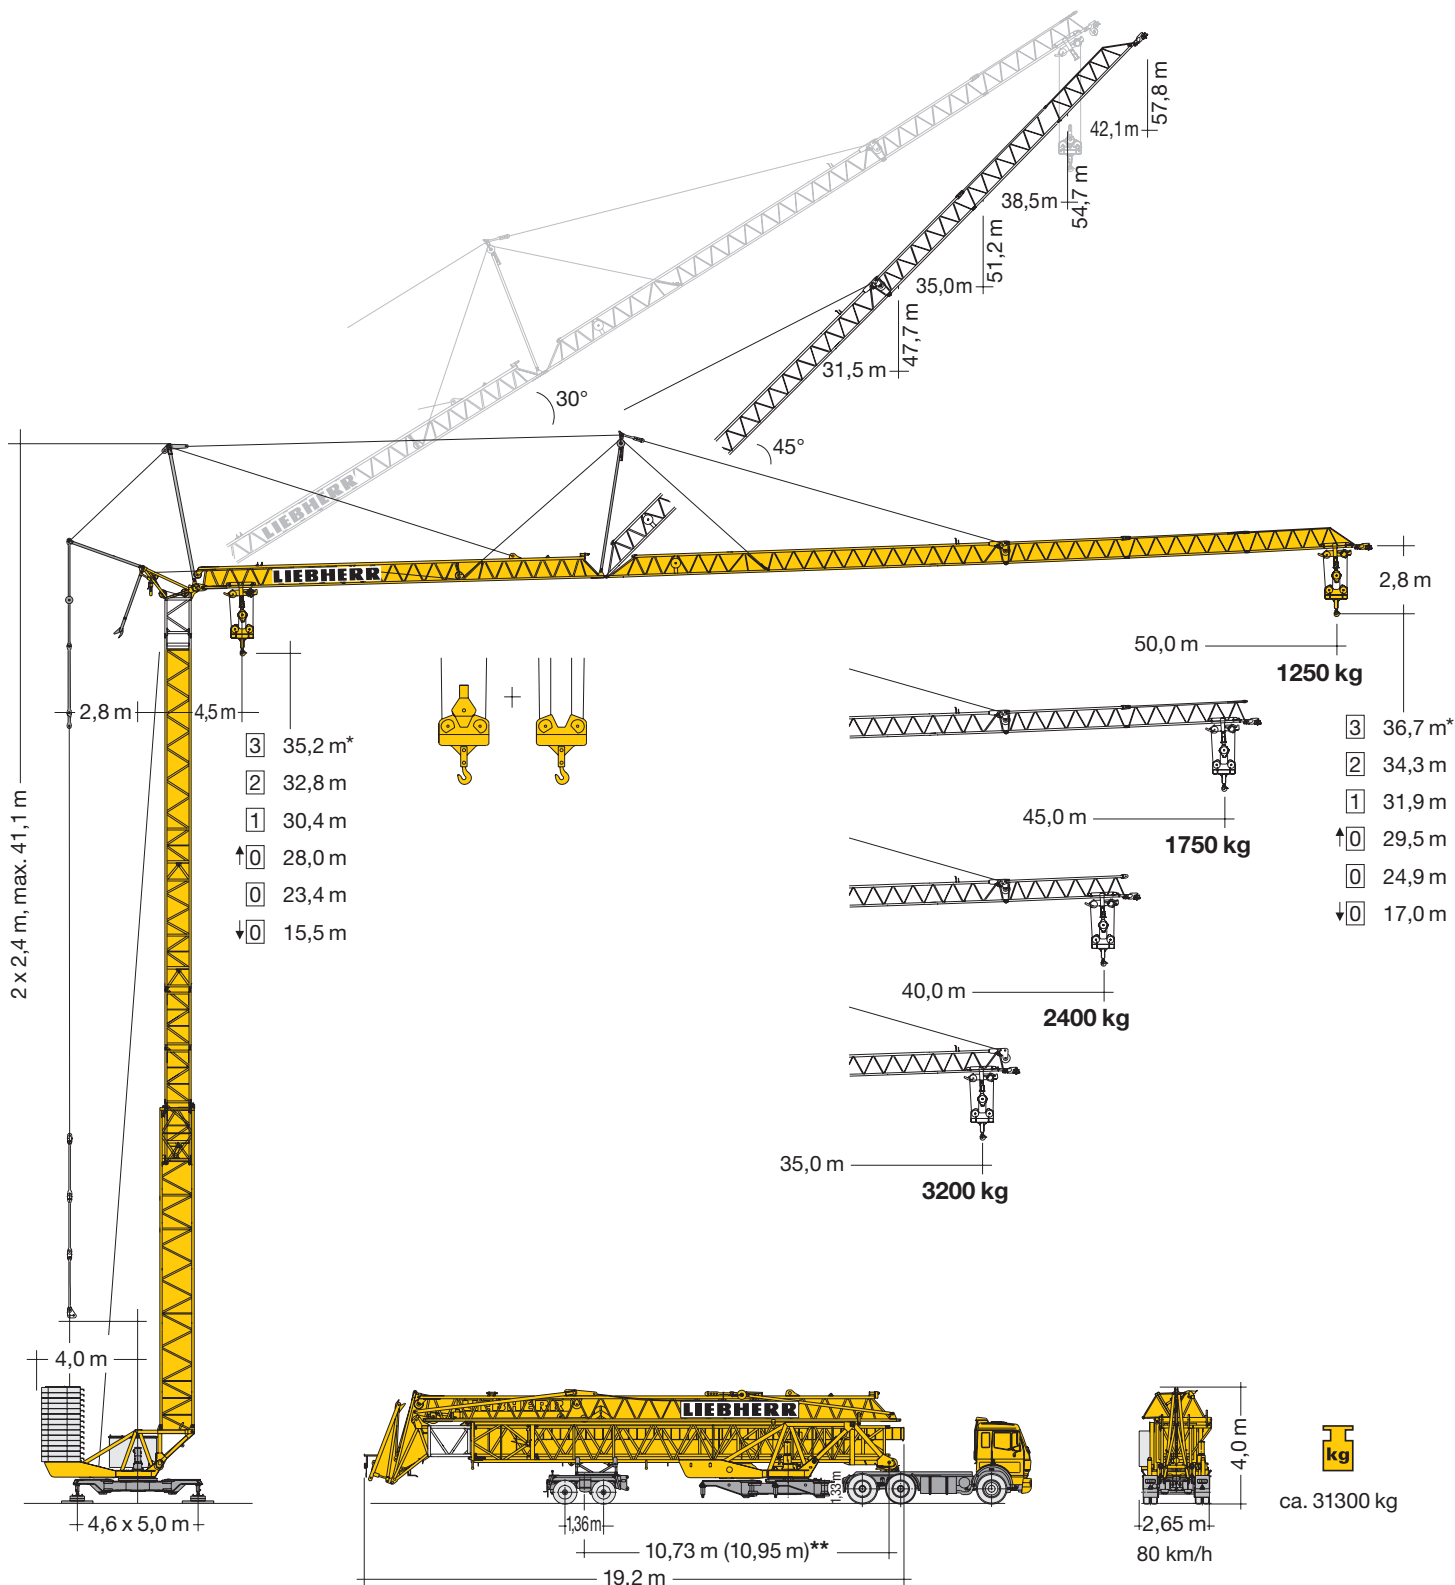

Gewicht

Weight / Poids / Peso / Peso / Pesos / Macca

	$r = 4,0 \text{ m}$ 44000 kg	28300 kg
--	---	-----------------

** siehe Betriebsanleitung. / see instruction manual. / voir manuel de service. / vedasi le istruzioni sull'uso. / según manual. / ver manual de instruções. / см. инструкцию по эксплуатации.

m	m/kg		m/kg															
			21,0	22,0	24,0	26,0	28,0	30,0	31,0	32,0	33,0	35,0	37,0	40,0	42,0	45,0	47,0	50,0
50,0	4,5 – 21,3 4000		4000	3860	3500	3190	2930	2700	2600	2500	2410	2250	2100	1910	1800	1660	1560	1450
45,0	4,5 – 24,3 4000		4000	4000	4000	3710	3400	3150	3030	2920	2820	2630	2460	2250	2120	1950		
40,0	4,5 – 27,7 4000		4000	4000	4000	4000	3950	3680	3550	3430	3320	3120	2940	2700				
35,0	4,5 – 30,4 4000		4000	4000	4000	4000	4000	4000	3930	3810	3700	3500						

max. 2 Turmstücke / max. 2 tower sections / max. 2 éléments de mât / max. tre elementi torre / max. 2 tramos / max. 2 segmentos de torre / макс. 2 башенных секций

m	m/kg		m/kg															
			21,0	22,0	24,0	26,0	28,0	30,0	31,0	32,0	33,0	35,0	37,0	40,0	42,0	45,0	47,0	50,0
50,0	4,5 – 20,4 4000		3870	3660	3300	2990	2730	2510	2400	2310	2220	2060	1910	1720	1610	1460	1360	1250
45,0	4,5 – 23,3 4000		4000	4000	3860	3510	3210	2950	2830	2720	2620	2430	2270	2050	1920	1750		
40,0	4,5 – 26,5 4000		4000	4000	4000	4000	3750	3440	3310	3180	3060	2840	2650	2400				
35,0	4,5 – 29,2 4000		4000	4000	4000	4000	4000	3870	3720	3580	3440	3200						
m	m/kg		m/kg															
			21,0	22,0	24,0	26,0	28,0	30,0	31,0	32,0	33,0	35,0	37,0	40,0	42,0	45,0	47,0	50,0
50,0	4,5 – 11,2 8000		3870	3660	3300	2990	2730	2510	2400	2310	2220	2060	1910	1720	1610	1460	1360	1250
45,0	4,5 – 12,8 8000		4520	4280	3860	3510	3210	2950	2830	2720	2620	2430	2270	2050	1920	1750		
40,0	4,5 – 14,8 8000		5290	5000	4510	4100	3750	3440	3310	3180	3060	2840	2650	2400				
35,0	4,5 – 16,4 8000		5950	5630	5070	4610	4210	3870	3720	3580	3440	3200						


max. 2 Turmstücke / max. 2 tower sections / max. 2 éléments de mât / max. tre elementi torre / max. 2 tramos / max. 2 segmentos de torre / макс. 2 башенных секций

m	m/kg		Auslegersteilstellung 30° / Elevated jib 30° / Flèche inclinée 30° / Braccio inclinato a 30° Pluma inclinada 30° / Lança inclinada 30° / Положение стрелы под углом 30°															
			22,0	23,0	24,0	25,0	26,0	27,0	28,0	29,0	30,0	30,6	31,0	33,0	34,9	36,0	38,0	39,3
39,3	4,5 – 18,5 4000		3340	3190	3050	2920	2800	2690	2580	2480	2390	2340	2300	2150	2010	1940	1820	1750
34,9	4,5 – 22,1 4000		4000	3840	3680	3540	3400	3270	3150	3040	2940	2880	2840	2660	2500			
30,6	4,5 – 24,9 4000		4000	4000	4000	3980	3840	3710	3590	3470	3360	3300						

max. 2 Turmstücke / max. 2 tower sections / max. 2 éléments de mât / max. tre elementi torre / max. 2 tramos / max. 2 segmentos de torre / макс. 2 башенных секций

m	m/kg		m/kg															
			21,0	22,0	24,0	26,0	28,0	30,0	31,0	32,0	33,0	35,0	37,0	40,0	42,0	45,0	47,0	50,0
50,0	4,5 – 18,8 4000		3560	3390	3080	2820	2590	2400	2310	2220	2140	1990	1860	1690	1580	1450	1360	1250
45,0	4,5 – 21,6 4000		4000	3930	3600	3300	3050	2830	2720	2630	2540	2370	2220	2030	1910	1750		
40,0	4,5 – 25,0 4000		4000	4000	4000	3850	3560	3310	3190	3090	2980	2790	2630	2400				
35,0	4,5 – 28,5 4000		4000	4000	4000	4000	4000	3780	3650	3530	3410	3200						
m	m/kg		m/kg															
			21,0	22,0	24,0	26,0	28,0	30,0	31,0	32,0	33,0	35,0	37,0	40,0	42,0	45,0	47,0	50,0
50,0	4,5 – 9,0 8000		3560	3390	3080	2820	2590	2400	2300	2220	2140	1990	1860	1690	1580	1450	1360	1250
45,0	4,5 – 10,3 8000		4130	3930	3590	3300	3050	2830	2720	2630	2540	2370	2220	2030	1900	1750		
40,0	4,5 – 12,0 8000		4770	4560	4180	3850	3560	3300	3190	3090	2980	2790	2630	2400				
35,0	4,5 – 14,0 8000		5450	5200	4770	4390	4070	3780	3650	3530	3410	3200						

* 3 Turmstücke / 3 tower sections / 3 éléments de mât / tre elementi torre / 3 tramos / 3 segmentos de torre / 3 башенных секций

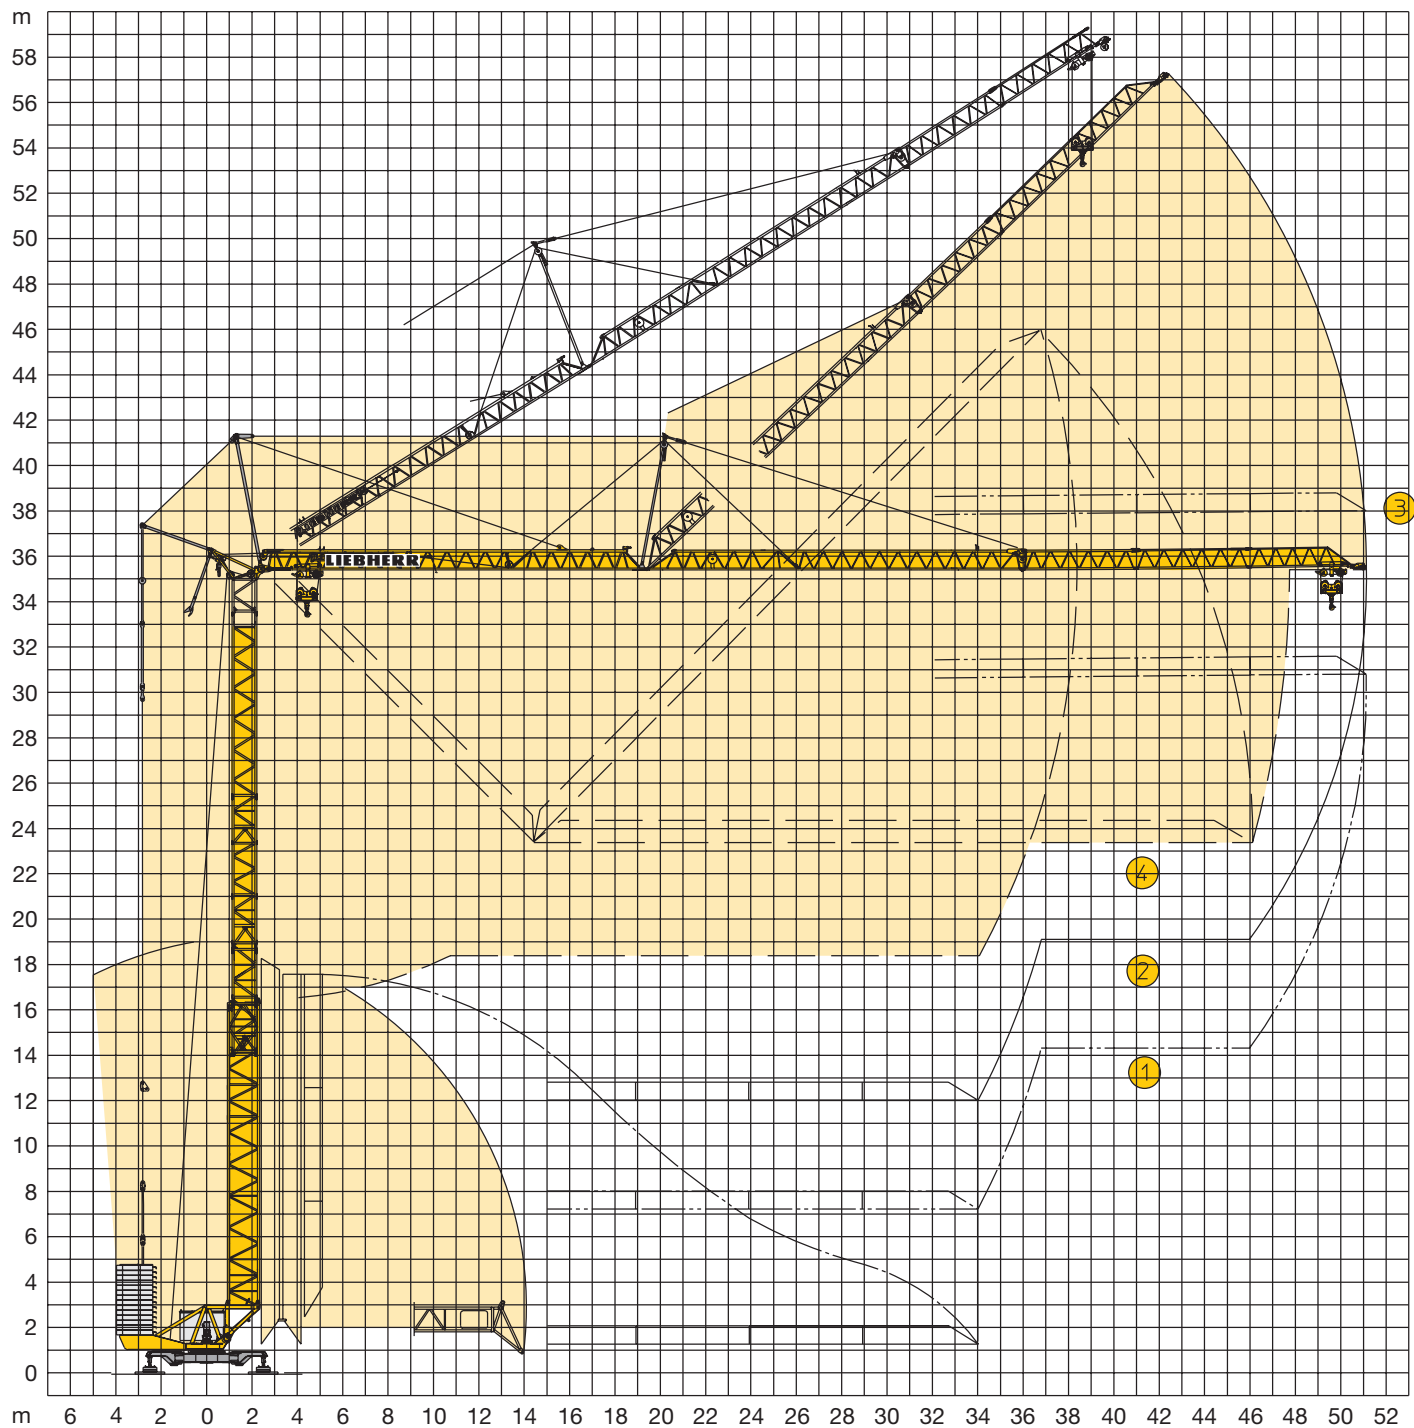

①
ohne Turmstück
without tower section
sans éléments de mât
senza elementi di torre
sin tramo de torre
sem tramo de torre
без башенных секций

②
2 Turmstücke
2 tower sections
2 éléments de mât
2 elementi di torre
2 tramos de torre
2 tramos de torre
2 башенные секции

③
3 Turmstücke, reduzierte Lastkurve
3 tower sections, reduced load curve
3 éléments de mât, courbe de charge réduite
tre elementi torre, curva di carico ridotta
3 tramos de torre, curva de carga rebajada
3 segmentos de torre, curva de carga reduzida
3 башенные секции, сокращенная кривая грузоподъемности

④
Hohe Aufstellkurve, 2 Turmstücke
High erecting curve, 2 tower sections
Courbe de montage haute, 2 éléments de mât
Elevata curva di montaggio, due elementi torre
Mayor curva de desarrollo de montaje, 2 tramos de torre
Montagem elevada, 2 segmentos de torre
высокая монтажная траектория, 2 башенные секции

	U/min. 0 ↔ 0,8 sl./min tr./min	7,5 kW FU
	0 ↔ 70,0 m/min	5,0 kW FU
	25,0 m/min	2 x 3,0 kW FU
	0 ↔ 45°, 2 min.	5,0 kW FU

	↔ stufenlos / stepless / régl. continu régl. progressiva / sin escalones / sem degraus / Бесступенчатый kg m/min	
22,0 kW FU WIW 230 LX 020	 Gang Speed Vitesse Marcia Velocidad Velocidade Передача 1 4000 0 ↔ 25,0 1500 0 ↔ 58,0	
	 Gang Speed Vitesse Marcia Velocidad Velocidade Передача 1 8000 0 ↔ 12,5 3400 0 ↔ 29,0	

BGL		C.0.08.0112		+		C.0.08.0100
------------	--	-------------	--	---	--	-------------

	400 V	Hz	kVA
110,0 m	4 x 16 mm ²	50	32,0

Kolli-Liste

Packing List / Liste de colisage / Lista dei colli
Lista de contenido / Lista de embalagem / Упаковочный лист

Pos. Item Rep. Voce Pos. Ref. Поз.	Anz. Qty. Qte. Qta. Cant. Cant. Кол-во				L (m)	B (m)	H (m)	kg
1	2	Turmstück (mit Turmauflage) / Tower section (with tower support) / Élément de mât (avec support de mât) / Elemento di torre (con pedana di servizio) / Tramo de torre (con soporte de torre) / Tramo de torre (com suporte de torre) / Башенная секция (с упорами)			2,52	1,11	1,11	780
2	1	Ausleger-Verlängerung 35,0 m – 40,0 m Jib extension / Rallonge de la flèche Elemento estensione braccio / Prolongación de pluma / Extensão da lança / Удлинение стрелы			5,24	1,02	0,99	350
3	1	Ausleger-Verlängerung 40,0 m – 45,0 m Jib extension / Rallonge de la flèche Elemento estensione braccio / Prolongación de pluma / Extensão da lança / Удлинение стрелы			5,16	1,02	0,92	220
4	1	Ausleger-Verlängerung 45,0 m – 50,0 m Jib extension / Rallonge de la flèche Elemento estensione braccio / Prolongación de pluma / Extensão da lança / Удлинение стрелы			4,73	1,02	0,89	170
5	1	Transportachse Tra 203 / Road transport axle Essieux de transport / Assali par trasporto / Eje de transporte / Eixo de transporte / Транспортная ось			3,00	2,50	1,20	2500
6	1	Transportachse Tra 204 / Road transport axle Essieux de transport / Assali par trasporto / Eje de transporte / Eixo de transporte / Транспортная ось			3,10	2,50	1,10	1900
7	1	Transportachse Tra 205 / Road transport axle Essieux de transport / Assali par trasporto / Eje de transporte / Eixo de transporte / Транспортная ось			3,00	2,50	1,20	3000
8	1	Kiste mit Kleinteilen, Seilen / Crate with small parts, ropes Caisse contenant des accessoires, câbles / Cassa con minuteria, funi / Caja con piezas pequeñas, cables / Caixa com peças pequenas, cabos / Ящик с мелкими деталями, с канатами			1,00	0,80	1,00	450

Konstruktionsänderungen vorbehalten! / Subject to alterations! / Sous réserves de modifications! / Reservato il diritto di modifiche strutturali! / ¡Sujeto a modificaciones! / Salvo modificação da construção! / Права на внесение конструкторских изменений сохраняются!

Sämtliche Angaben erfolgen ohne Gewähr. / This information is supplied without liability. / Ces renseignements sont sans garantie. / Tutte le indicazioni fornite senza garanzia. / Declinamos toda responsabilidad derivada de la información proporcionada. / Declinamos qualquer responsabilidade quanto à informação fornecida. / Все данные указаны без обязательств.

120 P – 5813 • EN 14439:2009 – DIN 15018-H1/B3 • BGL C.0.08.0112 • 01.10 / 7

Printed in Germany.